

Connect and win: The role of social networks in political elections

Arda Halu,¹ Kun Zhao,¹ Andrea Baronchelli,^{1,2} and Ginestra Bianconi¹

¹*Department of Physics, Northeastern University, Boston, Massachusetts 02115 USA*

²*Laboratory for the Modeling of Biological and Socio-technical Systems,
Northeastern University, Boston MA 02115 USA*

Many networks do not live in isolation but are strongly interacting, with profound consequences on their dynamics. Here, we consider the case of two interacting social networks and, in the context of a simple model, we address the case of political elections. Each network represents a competing party and every agent on the election day can choose to be either active in one of the two networks (vote for the corresponding party) or to be inactive in both (not vote). The opinion dynamics during the election campaign is described through a simulated annealing algorithm. We find that for a large region of the parameter space the result of the competition between the two parties allows for the existence of pluralism in the society, where both parties have a finite share of the votes. The central result is that a densely connected social network is key for the final victory of a party. However, small committed minorities can play a crucial role, and even reverse the election outcome.

PACS numbers: 64.60.aq, 64.60.Cn, 89.75.Hc

Interacting and interdependent networks have recently attracted great attention [1–10]. Here, the function of a node in one network depends on the operational level of the same node in the other networks. Investigated examples range from infrastructure networks as the power-grid and the Internet [1] to interacting biological networks in physiology [10]. Understanding how critical phenomena [11, 12] are affected by the presence of interactions or interdependent networks is crucial to control and monitor the dynamics of and on complex systems. In this context it was shown that interdependent networks are more fragile than single networks, and that the percolation transitions can be first order [1].

Interesting, but so far less explored, is the case of interacting social networks, describing individuals that manage their personal relationships in different social contexts (e.g., work, family, friendship, etc.). Taking into account these multiple layers is crucial, as proven recently for community detection methods in social networks [13–15], but the effect of their presence is still not understood in many respects. For example, there is considerable current interest in opinion models [16], among which we cite the the Sznajd model [17], the voter model [18], the naming game [19, 23] and the dynamic opinion model [21]. But all of these examples consider the influence of just one single social network.

Here we propose a simple model for opinion dynamics that describes two parties competing for votes during a political campaign. Every opinion, i.e., party, is modeled as a social network through which a contagion dynamics can take place. Individuals, on the other hand, are represented by a node on each network, and can be active only in one of the two networks (vote for one party) at the moment of the election. Each agent has also a third option [19, 20, 22, 23], namely not to vote, and in that case she will be inactive in both networks. Crucially, agents are affected by the opinion of their neighbors, and

the nodes tend to be active in the networks where their neighbors are also active. Moreover, the chance of changing opinion decreases as the decision moment approaches, in line with the observation that vote preferences stabilize as the election day comes closer [24].

Our aim is to provide insights in the role of multiple social networks in the voting problem through a simple and clear mathematical model, in the spirit, for example, of recent work concerning the issue of ideological conflict [22]. We describe the dynamics of social influence in the two networks, and we model the uncertainty reduction preceding the vote through a simulated annealing process. Long before the election the agents change opinions and can sustain a small fraction of antagonistic relations, but as the election approaches their dynamics slows down, until they reach the temperature $T = 0$ at the election day. At that moment, the party winning the elections is the one with more active nodes. Finally, we focus on the case in which the networks sustaining each party are represented by two Poisson graphs, and address the role of different average connectivities. This choice is consistent for example with the data on social networks of mobile phone communication, which are characterized by a typical scale in the degree (being fitted with a power-law distribution of exponent $\gamma = 8.4$) [25].

We observe a rich phase diagram of the opinion dynamics. The results are that in the thermodynamic limit the most connected network wins the election independent of the initial condition of the system, in agreement with recent results on the persuasive role of a densely connected social network [26]. However, for a large region of the parameters the voting results of the two parties are very close and small perturbations could alter the results. In this context, we observe that a small minority of committed agents can reverse the outcome of the election result, thus confirming the results obtained in very recent and different models [22, 23].

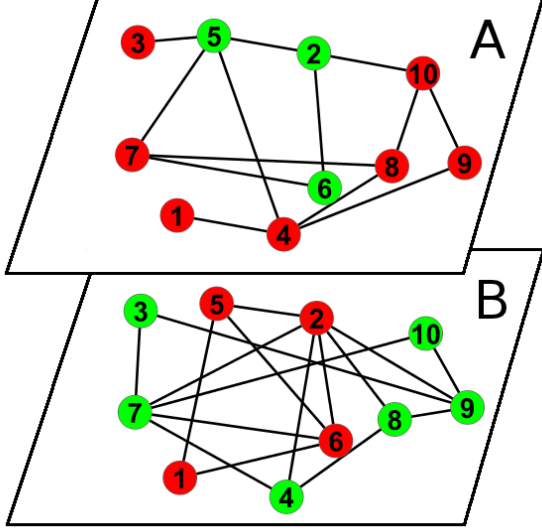


FIG. 1: (Color online) The two competing political parties are represented by two networks. Each agent is represented in both networks but can either be active (green node) in only one of the two or inactive (red node) in both networks. Moreover the activity of neighbor nodes influence the opinion of any given node.

Parties as antagonistic social networks. We consider two antagonistic networks A, B representing the social networks of two competing political parties. Each agent i is represented in each network and can choose to be active in one of the networks. In particular $\sigma_i^A = 0$ if agent i is inactive in network A and $\sigma_i^A = 1$ if agent i is active in network A . Similarly $\sigma_i^B = 0, 1$ indicates if a node is active or inactive in network B . Since ultimately the activity of an individual in a network corresponds to the agent voting for the corresponding party, each agent can be active only on one network on the election day (i.e. if $\sigma_i^A = 1$ then $\sigma_i^B = 0$ and if $\sigma_i^B = 1$ then $\sigma_i^A = 0$). Nevertheless we leave to the agent the freedom not to vote, in that case $\sigma_i^A = \sigma_i^B = 0$. Moreover agents are influenced by their neighbors. Therefore, we assume that, on the election day, if at least one neighbor of agent i is active in network A , the agent will be active in the same network (network A) provided that it is not already active in network B . We assume that a symmetrical process is occurring for the opinion dynamics in network B . Hence, the mathematical constraints that our agent opinions need to satisfy at the election day are:

$$\begin{aligned} \sigma_i^A &= \left[1 - \prod_{j \in N_A(i)} (1 - \sigma_j^A) \right] (1 - \sigma_i^B) \\ \sigma_i^B &= \left[1 - \prod_{j \in N_B(i)} (1 - \sigma_j^B) \right] (1 - \sigma_i^A), \end{aligned} \quad (1)$$

where $N_A(i)$ ($N_B(i)$) are the set of neighbors of node i in network A (network B). The model just described is depicted in Figure 1.

Evolution dynamics during the election campaign-

To model how agents decide on their vote during the pre-election period we consider the following algorithm. We consider a Hamiltonian that counts the number of the constraints in Eq. (1) that are violated. Therefore we take a Hamiltonian H of the following form

$$\begin{aligned} H &= \sum_i \left\{ \sigma_i^A - \left[1 - \prod_{j \in N_A(i)} (1 - \sigma_j^A) \right] (1 - \sigma_i^B) \right\}^2 + \\ &\quad \sum_i \left\{ \sigma_i^B - \left[1 - \prod_{j \in N_B(i)} (1 - \sigma_j^B) \right] (1 - \sigma_i^A) \right\}^2 \end{aligned} \quad (2)$$

We consider the fact that long before the election the agents are free to change opinion and therefore we model their dynamics as a Monte Carlo dynamics which equilibrates following the Hamiltonian H with a relatively high initial temperature, i.e. some conflicts are allowed in the system. As the election day approaches, the effective temperature of the opinion dynamics decreases and the agents tend to reduce to zero the number of conflicts with their neighbors. The opinion dynamics described in this way is implemented with a simulated annealing algorithm. We start at high temperature and we allow the system to equilibrate by a large number of Monte Carlo steps, then we slowly reduce the temperature until we reach a state where the Hamiltonian is $H = 0$ and there are no more conflicts in the network. It turns out that the Hamiltonian H has in general multiple fundamental states and the simulated annealing algorithm always find one of these states. In Figure 2 we report the result of this opinion dynamics for two antagonistic networks with Poisson degree distributions and different average connectivities. In particular we plot the size S_A of the giant component of the percolating cluster in network A . Additionally we have characterized the finite size effects (see Figure 3) and concluded that the phase diagram of the model is consistent with the following scenario valid in the limit of large network sizes:

- *Region (I):* $z_A < 1, z_B < 1$. In this region both giant components in network A (S_A) and network B (S_B) are zero, $S_A = 0, S_B = 0$, and therefore essentially agents never vote.
- *Region (II) in Figure 2:* In this region the giant component in network B emerges, $S_B > 0, S_A = 0$.
- *Region (III) in Figure 2:* In this region the giant component in network A emerges, $S_A > 0, S_B = 0$.
- *Region (IV) in Figure 2* In this region we have the pluralism solution of the opinion dynamics and

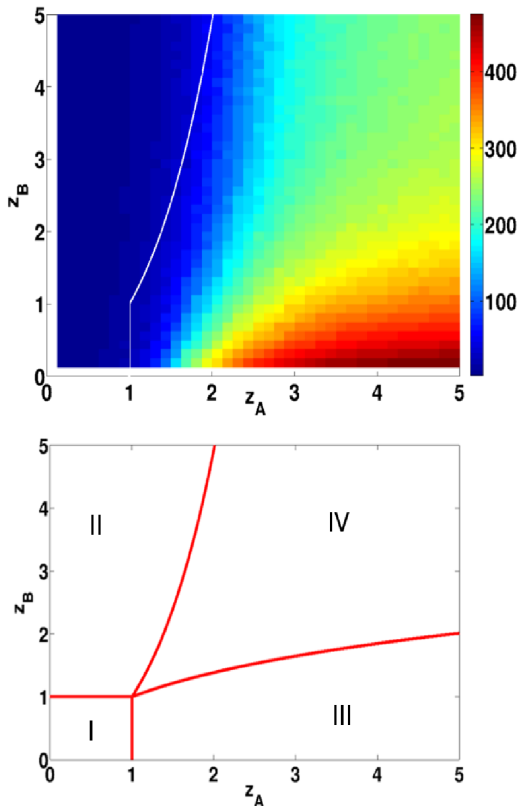


FIG. 2: (Color online) (Panel A) The size of the largest connected component in network A at the end of the simulated annealing calculation as a function of the average connectivity of the two networks: z_A and z_B respectively. The data is simulated for two networks for $N = 500$ nodes and averaged 60 times. The simulated annealing algorithm is independent of initial conditions. (Panel B) The schematic representation of the different phases of the proposed model.

both giant component in network A and B are different from zero, $S_A > 0, S_B > 0$.

In Regions II (III) the active agents in party B (party A) percolate the system while agents in party A (party B) remain concentrated in disconnected clusters. Nevertheless, if the average connectivity of the two antagonistic parties is comparable (Region IV), the system can sustain an effective pluralism of opinions with both parties percolating in the system. Therefore, we find the interesting result that if the connectivity of the two parties is large enough, the pluralism can be preserved in the model and there will be two parties with a high number of votes. In order for a party to win the election, it is necessary that the active agents percolate in the corresponding network. The election outcome, nevertheless, depends crucially on the total number of votes in network A, m_A and the total number of votes in network B, m_B . In Figure 4 we plot the difference between the number of votes in network A and the number of votes in network B.

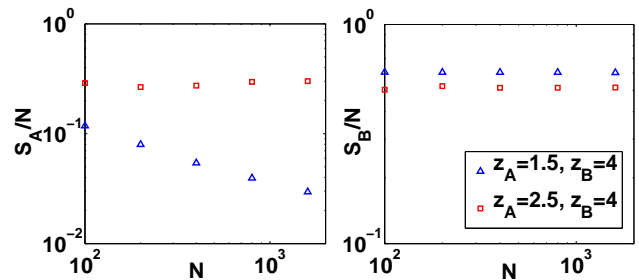


FIG. 3: (Color online) We represent the fraction of nodes in the giant component S_A of network A and in the giant component S_B of network B in different regions of the phase space. In region II ($z_A = 1.5, z_B = 4$) the giant component in network A (S_A) disappears in the thermodynamic limit while in region IV ($z_A = 2.5, z_B = 4$) it remains constant. The giant component in network B remains constant in the thermodynamic limit both in region II and region IV. Each data point is simulated for the two networks for N nodes and averaged 200 times.

Very interestingly, we observe that the more connected party (network) has the majority of the votes. It is also worth noting that the final outcome of the election does not depend on the initial conditions. Overall, this result supports the intuition that if a party has a supporting network that is more connected it will win the elections, and is coherent with recent results concerning the role of densely connected social networks on the adoption of a behavior [26].

Committed agents. Very recently, different models have focused on the role of committed agents in opinion dynamics [22, 23]. Here to consider the role of committed agents in the network during the election campaign, we perform a simulated annealing algorithm where a fraction of the nodes always remain active in one of the two networks, never changing their opinion. Figure 5 shows that in Region IV a small fraction of agents $f \simeq 0.1$ in the less connected network can reverse the outcome of the election. Interestingly this finding fits perfectly with the results of the radically different models proposed in [22, 23]. Thus the best strategy to win the election is to build a well connected network and at the same time to have committed agents to the party.

Conclusions. In conclusion, we have put forth a simple model for the opinion dynamics taking place during an election campaign. We have modeled parties (or opinions) in terms of a social networks, and individuals in terms of nodes belonging to these social networks and connecting them. We have considered the case of antagonistic agents who have to decide for a single party, or for none of them. We have described the quenching of the opinions preceding the voting moment as a simulated annealing process where the temperature is progressively lowered till the voting moment, when the individuals

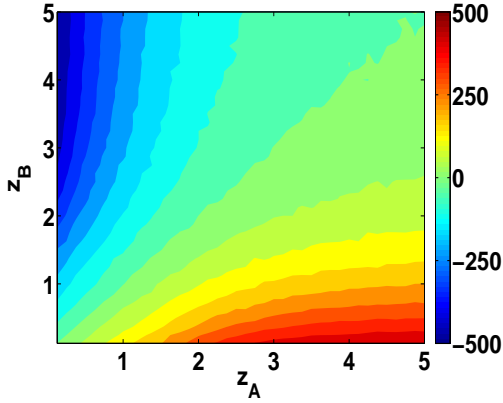


FIG. 4: (Color online) The contour plot for the difference between the total number of votes m_A in party A (total number of agents active in network A) and the total number of votes m_B in party B (total number of agents active in network B). The data is simulated for two networks for $N = 500$ nodes and averaged 90 times. It is clear that the larger the difference in average connectivity of the two networks, the larger the advantage of the more connected political party.

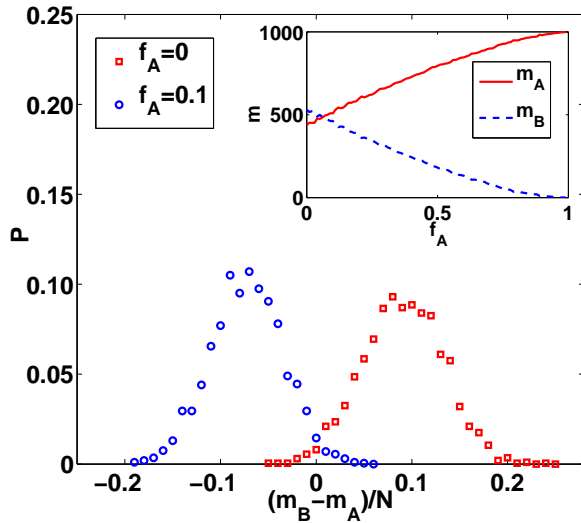


FIG. 5: (Color online) We represent the role of a fraction f of committed agents in reverting the outcome of the election. In particular we plot the histogram of the difference between the number of agents m_A voting for party A and the number of agents m_B voting for party B for a fraction f_A of committed agents to party A, with $f_A = 0$ and $f_A = 0.1$ and average connectivities of the networks $z_A = 2.5$, $z_B = 4$. The histogram is performed for 1000 realizations of two networks of size $N = 1000$. In the inset we show the average number of agents in network A (m_A) and agents in network B (m_B) as a function of the fraction of committed agents f_A . A small fraction of agents ($f_A \simeq 0.1$) is sufficient to reverse the outcome of the elections. The data in the inset is simulated for two networks for $N = 1000$ nodes and averaged 10 times.

minimize the number of conflicts with their neighbors. We have shown that there is a wide region in the phase diagram where two antagonistic parties survive gathering a finite fraction of the votes, and therefore the existence of pluralism in the election system. Moreover, we have pointed out that a key quantity to get a finite share of the overall votes is the connectivity of the networks corresponding to a different parties. Nevertheless connectivity is not sufficient to win the elections, since a small fraction of committed agents is sufficient to invert the results of the voting process.

Though deliberately basic, the model provides insights into different aspects of the election dynamics. In future works we plan to generalize the model by studying antagonistic networks with different topologies, such as competing scale-free and Poisson networks or two competing scale-free networks. Other extensions of this model could describe several competing parties, consider a threshold dynamics as the one triggering the opinion formation of the agents in [26], or relax the hypothesis of purely antagonistic interactions, thus allowing the agents to express multiple preferences in a multi-layered opinion space.

-
- [1] S. V. Buldyrev, R. Parshani, G. Paul, H. E. Stanley and S. Havlin, *Nature* **464** 1025 (2010).
 - [2] A. Vespignani, *Nature* **464**, 984 (2010).
 - [3] J. Gao, S. V. Buldyrev, S. Havlin, and H. E. Stanley, *Physical Review Letters* **107** 195701 (2011).
 - [4] R. Parshani, S. V. Buldyrev and S. Havlin, *PNAS*, **108** 1007 (2011).
 - [5] S.-W. Son, G. Bizhani, C. Christensen, P. Grassberger and M. Paczuski, *EPL* **97** 16006 (2012).
 - [6] G. J. Baxter, S. N. Dorogovtsev, A. V. Goltsev and J. F. F. Mendes, arXiv:1207.0448v1
 - [7] S. Gomez, A. Diaz-Guilera, J. Gomez-Gardeñes, C. J. Perez-Vicente, Y. Moreno, A. Arenas, arXiv:1207.2788
 - [8] E. Cozzo, A. Arenas, Y. Moreno, arXiv:1205.3111
 - [9] J. Gómez-Gardeñes, I. Reinares, A. Arenas and L.M. Floría *Scientific Reports* **2** 620 (2012)
 - [10] A. Bashan, R. P. Bartsch, J. W. Kantelhardt, S. Havlin, P. Ch. Ivanov *Nature Communications* **3** 702 (2012).
 - [11] S. N. Dorogovtsev, A. Goltsev and J. F. F. Mendes, *Rev. Mod. Phys.* **80**, 1275 (2008);
 - [12] A. Barrat, M. Barthélemy, A. Vespignani *Dynamical Processes on complex Networks* (Cambridge University Press, Cambridge, 2008).
 - [13] A. Lancichinetti, S. Fortunato and J. Kertész, *New J. Phys.* **11** 033015 (2009).
 - [14] T.S. Evans and R. Lambiotte, *Phys. Rev. E* **80** 016105 (2009).
 - [15] Y.-Y. Ahn, J. Bagrow and S. Lehmann, *Nature* **466** 761 (2010).
 - [16] C. Castellano, S. Fortunato and V. Loreto, *Rev. Mod. Phys.* **81** 591 (2009).
 - [17] K. Sznajd-Weron and J. Sznajd, *Int. J. Mod. Phys. C* **11** 1157 (2000).
 - [18] V. Sood and S. Redner, *Phys. Rev. Lett.* **94** 178701

- (2005).
- [19] A. Baronchelli, M. Felici, V. Loreto, E. Caglioti and L. Steels, J. Stat. Mech. P06014 (2006).
 - [20] A. Baronchelli, L. Dall'Asta, A. Barrat and V. Loreto Phys. Rev. E **76** 051102 (2007).
 - [21] J. Shao, S. Havlin and H. E. Stanley, Phys. Rev. Lett. **103** 018701 (2009).
 - [22] S. A. Marvel, H. Hong, A. Papus and S. H. Strogatz, Phys. Rev. Lett. **109** 118702 (2012).
 - [23] J. Xie, S. Sreenivasan, G. Korniss, W. Zhang, C. Lim and B. K. Szymanski, Phys. Rev. E **84** 011130 (2011).
 - [24] D. Sunshine Hillygusp, Public Opinion Quarterly, **75** 962 (2011).
 - [25] J.-P. Onnela, J. Saramäki, J. Hyvönen, G. Szabó, D. Lazer, K. Kaski, J. Kertész, and A.-L. Barabási PNAS **104** 7332 (2007).
 - [26] D. Centola, Science **329**, 1194 (2011).